
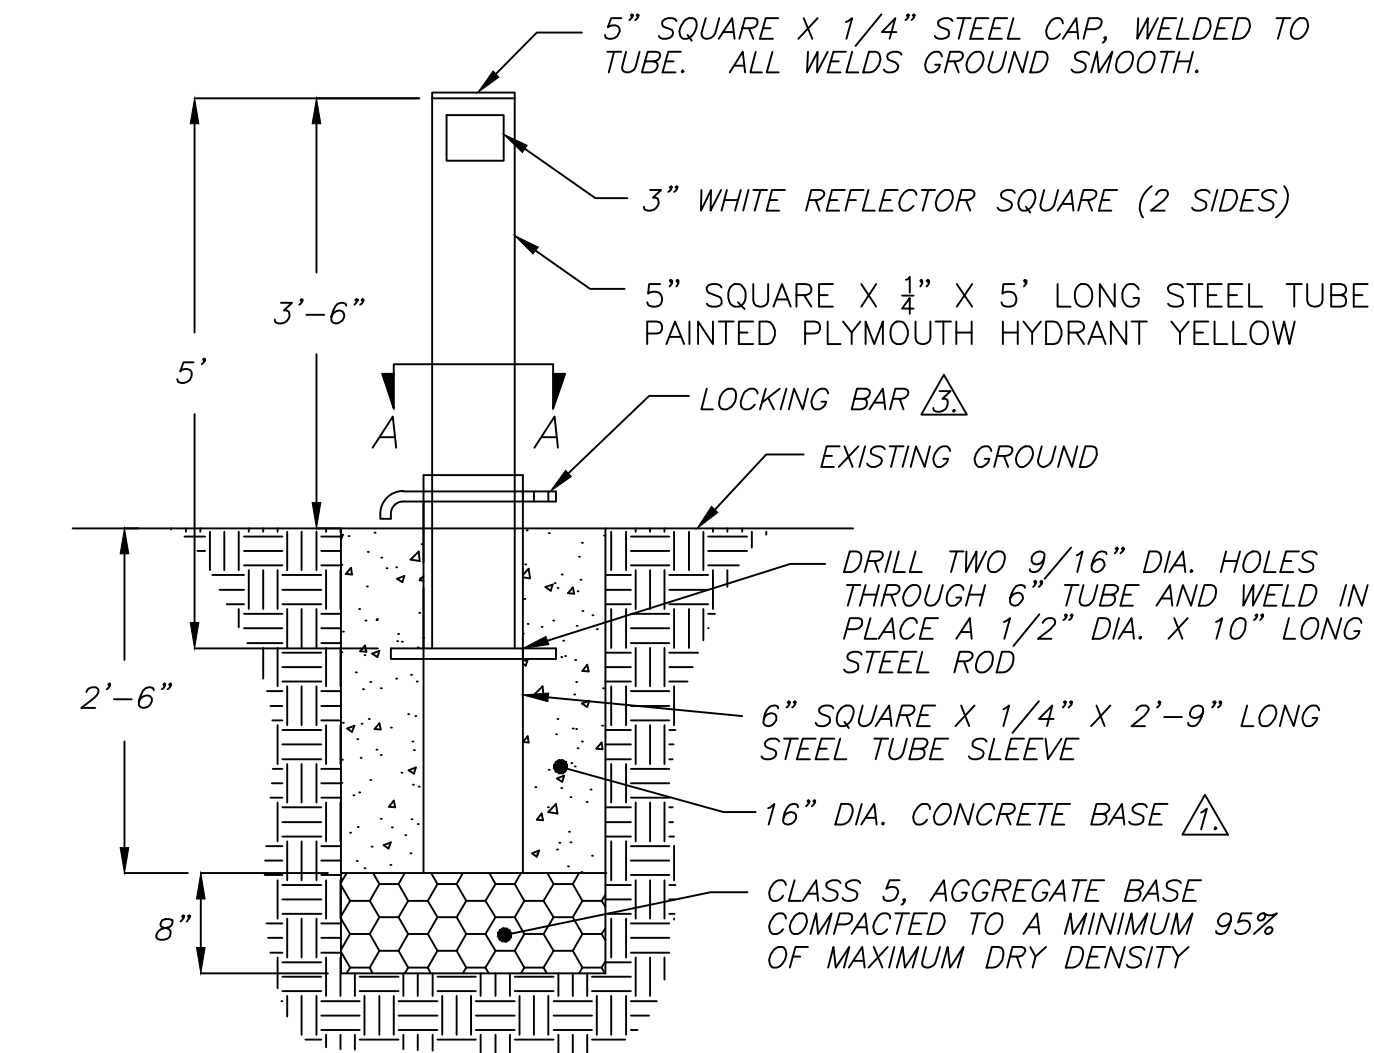


LOCKING BAR

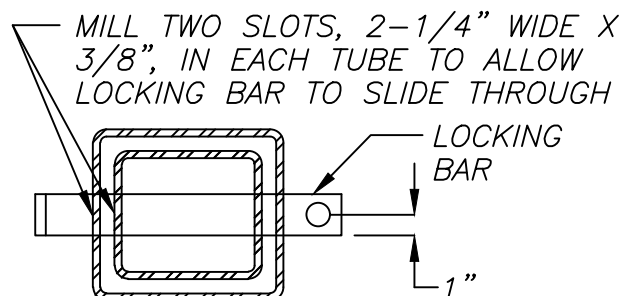

SECTION A-A

NOTES:

1. PORTLAND CEMENT CONCRETE SHALL HAVE THE FOLLOWING CHARACTERISTICS: 3000 PSI MINIMUM COMPRESSIVE STRENGTH AT 28 DAYS, MINIMUM 6 SACKS OF CEMENT PER CUBIC YARD WITH A SLUMP AT 1 TO 4 INCHES.
2. ALL WELDS AND BENDS SHALL BE SMOOTH, EVEN AND PAINTED.
3. DEPENDING ON THE APPLICATION, THE CITY PLYMOUTH SHALL PROVIDE THE PADLOCK AND MAINTAIN THE KEYS.
4. INSTALL ONE BOLLARD FOR EVERY 5' OF PAVEMENT WIDTH AT ALL TRAIL OR FIRE LANE ACCESSES



STANDARD DETAILS
REMOVABLE BOLLARD
CITY OF PLYMOUTH

PUBLISHED
3-25

CITY PL. NO.
STRT-28
REVISED 1-20